
TOKINA INDUSTRIAL, INC.
Precision CCTV Optics

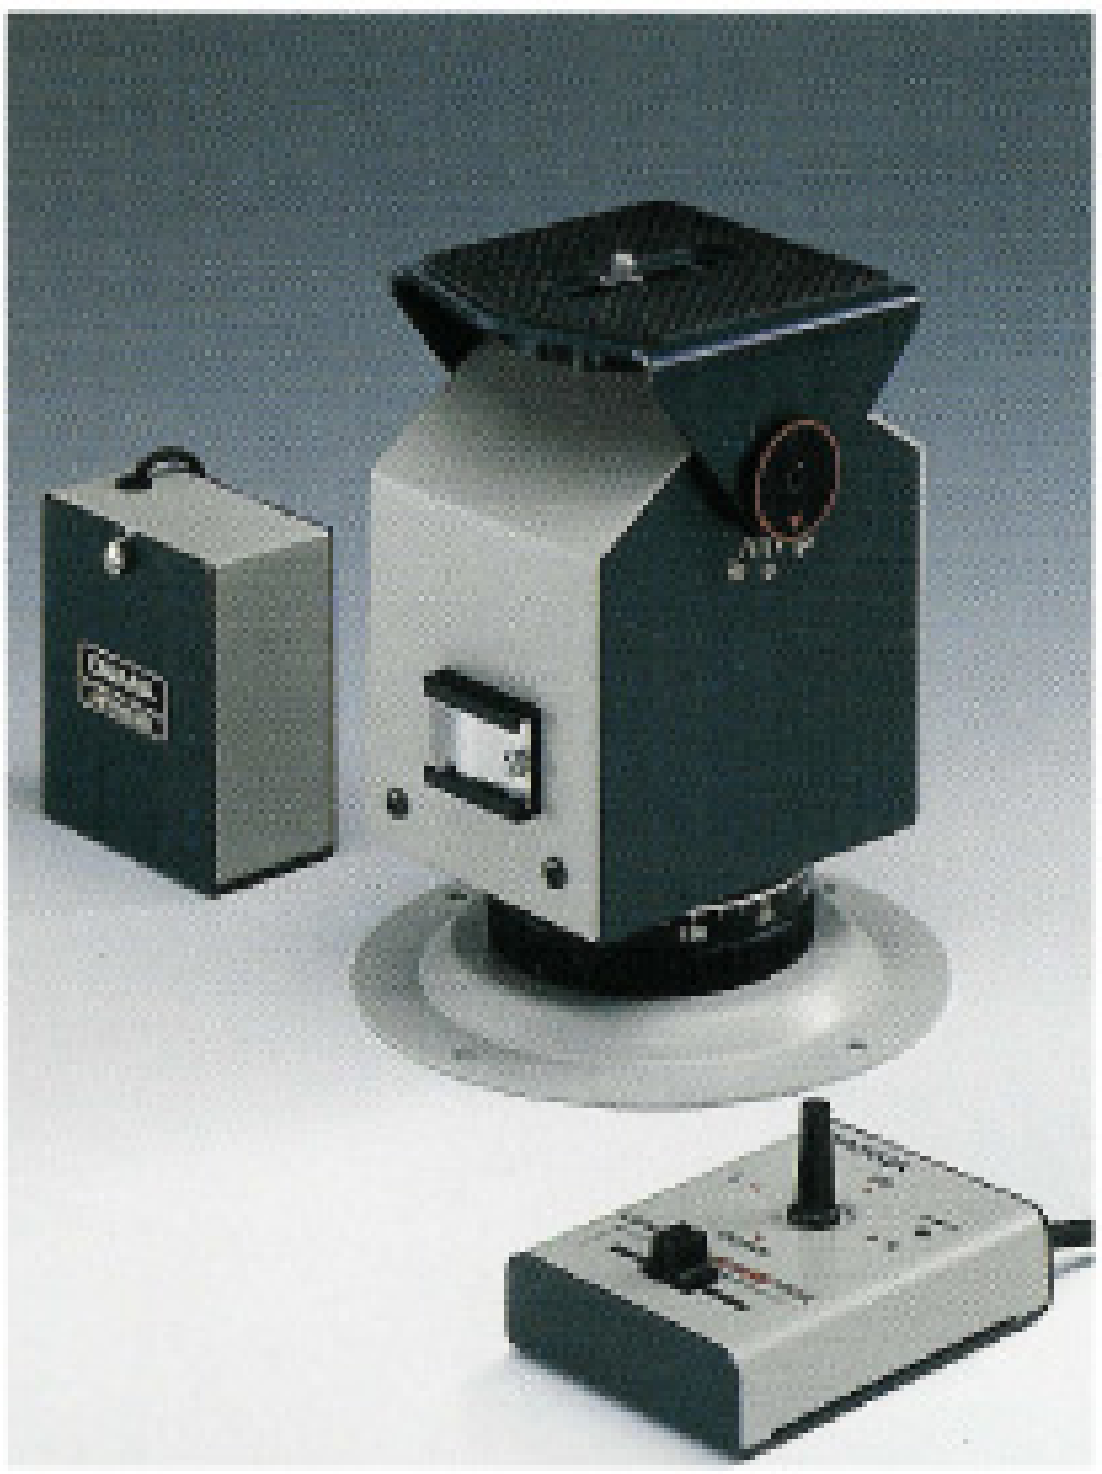

MVH-2D
INNOVATIVE STRONG PAN-TILT HEAD

SPECIFICATIONS

Mounting:	Horizontal and upright or inverted position
Operating Temperature:	-10℃ to 45℃
Dimensions:	90W × 144H × 106D mm
Weight:	1.45kg
Power Source:	DC 12V 270 mA max.(8xAA size penlite batteries)
Pan movement:	-150° to +150° in horizontal plane
Tilt movement:	-30° to +30° in vertical plane
Pan speed:	2.0°/sec. to 6.5°/sec.(Variable)
Tilt Speed:	0.7°/sec. to 2.2°/sec.(Variable)
Maximum Load:	5.0kg in upright position 3.0kg in inverted position
Maximum Cable Length:	200 m (by extending control cable)
Mounting Brackets:	PT-M2D Ceiling Mount Plate, WH-1, WH-2, WH-4, PT-W3 Wall Mounts(Option)

January 2003